




ONE CANTILEVER

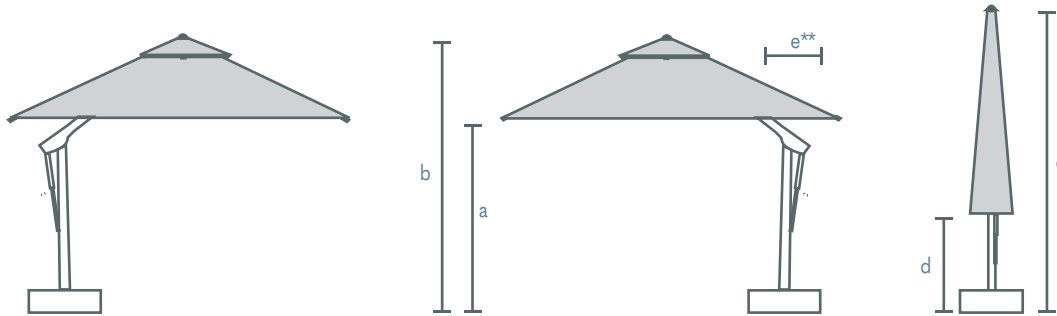

GENERAL MEASUREMENTS

DETAILED MEASUREMENTS

	MODEL	GENERAL MEASUREMENTS		DETAILED MEASUREMENTS									
				a		b		c		d		e	
	ONG2525	8' 0" x 8' 0"	250 x 250	7' 1"	215	8' 11"	273	11' 6"	350	5' 4"	163	0"	1
	ONG3030	10' 0" x 10' 0"	300 x 300	7' 1"	215	9' 0"	275	11' 6"	350	4' 4"	131	9"	23.5
	ONG3525	11' 6" x 11' 6"	350 x 350	7' 1"	215	9' 3"	283	11' 6"	350	3' 1"	94	1' 7"	49
	ONG3020	10' 0" x 6' 6"	300 x 200	7' 1"	215	9' 1"	276	11' 6"	350	5' 3"	159	10"	26
	ONG3525	11' 6" x 8' 0"	350 x 250	7' 1"	215	9' 3"	283	11' 6"	350	4' 1"	125	0"	1
	ONG4030	13' 0" x 10' 0"	400 x 300	7' 1"	215	9' 3"	281	11' 6"	350	3' 1"	94	9"	23
	ONGD30	Ø 10' 0"	Ø 300	7' 1"	215	9' 1"	278	11' 6"	350	6' 2"	189	5"	2.5
	ONGD35	Ø 11' 6"	Ø 350	7' 1"	215	9' 3"	283	11' 6"	350	5' 4"	163	1' 2"	5.5
	ONGD40	Ø 13' 0"	Ø 400	7' 1"	215	9' 5"	288	11' 6"	350	4' 6"	137	1' 11"	59

* Custom Sizes available upon request.

** e refers to the distance from the center of the base to the back edge of the canopy

SPECIAL FEATURES

▶ ADJUSTABLE CANOPY HEIGHT



- Please refer to the dimensions in centimeters (cm) as the primary measurements. The dimensions in inches (in) are approximate and provided for convenience only.
- All measurements consider the use of an in ground or bolt down base
- Custom sizes available upon request



ONE

SPECIFICATIONS

CATEGORY	Cantilever Umbrella	CANOPY	Yarn Dyed Marine Grade Acrylic 320 gsm
SHAFT SIZE	4.09" × 3.30" (104mm × 84mm)	ADJUSTABLE HEIGHT	No
SHAFT ALUMINUM THICKNESS	0.12" (3mm)	CANOPY TILT	Yes
SHAFT MATERIAL	Aluminum	UMBRELLA ROTATION	360°
NUMBER OF RIBS	8 Ribs	WEIGHT OF STRUCTURE	Approx 77 lbs (35 kg)
RIB MEASUREMENTS	1.38" × 0.79" (35mm × 20mm)	OPENING/CLOSING	Crank
RIB ALUMINUM THICKNESS	0.08" (2mm)	MECHANISM DETAILS	One Winch with Cable & Endless Screw
RIB MATERIAL	Aluminum	TELESCOPIC	Yes
RIB JOINTS	Nylon Triangle with Rivets	NUTS, BOLTS, SCREWS	Stainless Steel
ALUMINUM FINISH	Ribs and Shaft Powder Coated	VENT	Raised
		UMBRELLA COVER	Standard Cover Included


OPTIONS

▶ SOFT VENT



ACCESSORIES

▶ GUTTERS



Fabric gutter to connect umbrellas.

Vinyl top for water flow and connected with zipper and velcro.

CURTAINS



Fabric curtains to enclose umbrella area.

Can be made with vinyl windows.

Must be used with support rods.

LIGHTING

▶ LED SPOT LIGHTS



Watt 3
Volt 12

▶ LED STRIP LIGHTS



cm. 50 100
in. 20" 40"
Watt 9 18
Volt 12 2

▶ LUMINARIE







ONE

CANOPY

▶ VALANCE

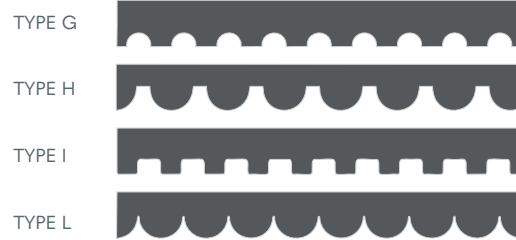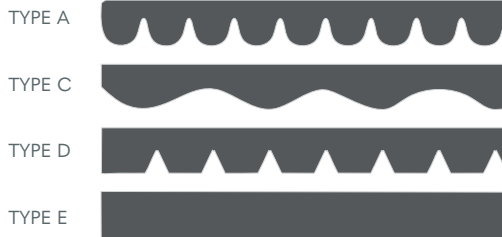

▶ ACCENT BORDERS



▶ FRINGE



▶ CONTRAST BINDING



▶ CONTRAST STITCHING

